


2

1

REVISIONS

ZONE	REV.	ECO NO.	DESCRIPTION	DATE	APPROVED		
					ENG.	QC.	MFG.
	1		ENGINEERING RELEASE				

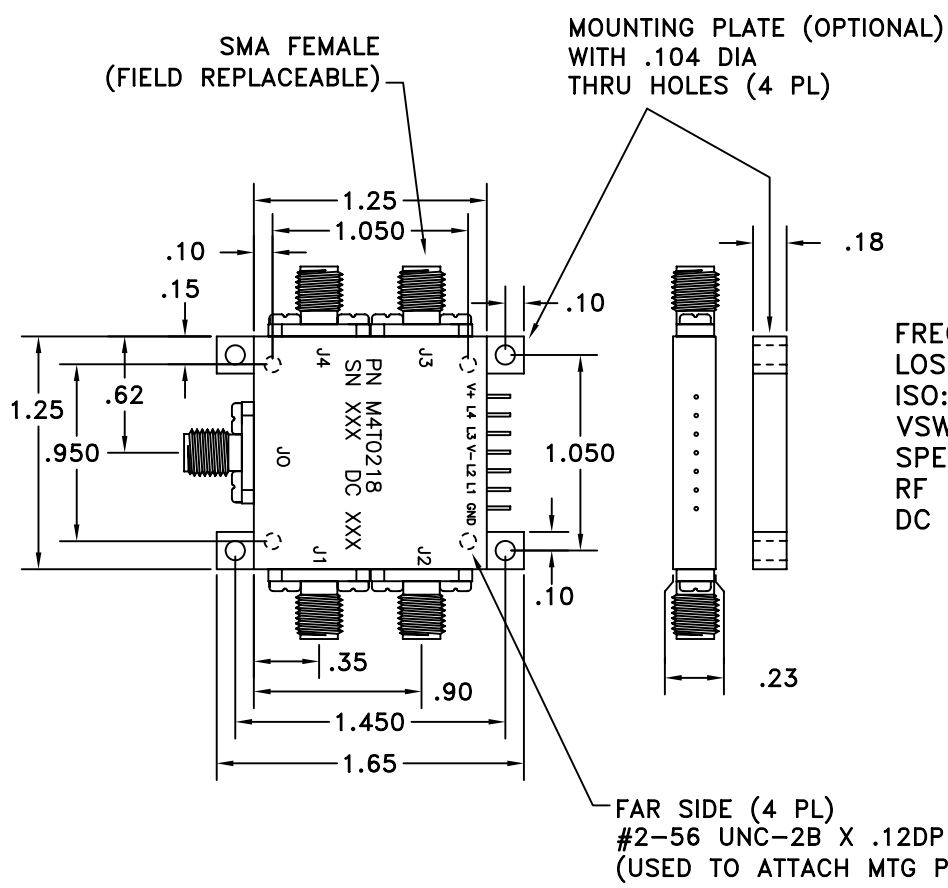

FREQ: 2-18Ghz
 LOSS: 3dB
 ISO: 60dB
 VSWR: 2:1
 SPEED: 100nS
 RF PWR: 27dBm
 DC PWR: +5,-12 or -15v

NOTES:

1. MATERIAL: ALUMINUM 6061-T6.
 - 1.1 BODY: PLATED WITH 200-300uIN SILVER PLATE PER QQ-S-365 TYPE II GRADE B.
 - 1.2 COVERS: IRRIDITED, CHEMICAL FILM PER MIL-C-5541, CLEAR.
2. FINISH
 - 2.1 GRAY EPOXY PAINT

TRUTH TABLE

L1	L2	L3	L4	SELECTED PATH
0	1	1	1	J0-J1
1	0	1	1	J0-J2
1	1	0	1	J0-J3
1	1	1	0	J0-J4

UNLESS OTHERWISE SPECIFIED	DRAWN BY M. ESPINOZA	DATE 01/14/08	MICRONETICS, INC. 26 HAMPSHIRE DRIVE * HUDSON, N.H. 03051 TEL.: (603) 883-2900 * FAX: (603) 882-8987	
	CHECKED BY	DATE		
	ENGINEER	DATE	TITLE SP4T SWITCH + MOUNTING PLATE	
	THIS DRAWING CONTAINS MATERIAL PROPRIETARY TO MICRONETICS		SIZE A	FSCM NO. 54487
COMMERCIAL PUBLISHED TOLERANCES SHALL APPLY TO TUBING, BAR, PLATE ETC. ALL THREADS TO BE CLASS 2A OR 2B. PLATED PARTS MUST FIT GAUGES AND MEET SPECIFIED TOLERANCES AFTER PLATING.		THIRD ANGLE PROJECTION	SCALE 1 TO 1	
CAUTION UNLESS THIS DRAWING BEARS AUTHORIZED SIGNED APPROVAL(S) IT IS PRELIMINARY AND IS NOT TO BE USED FOR MANUFACTURING PURPOSES.		DO NOT SCALE DRAWING	SHEET 1 OF 1	

2

1